

HIK134E + Z25DV75

HIK134LE + Z25DV75



professional holder for mounting cameras of HIKVISION, DAHUA, TVT and other brands on a pipe or mast in a vertical or horizontal position




HIK134LE + Z25DV75



Z25DV75




HIK134LE + Z25DV75
+ DS-1280ZJ-DM18

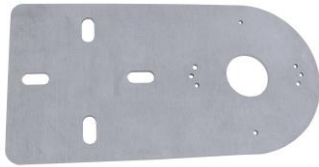

bracket plate HIK134E



Z85DV75

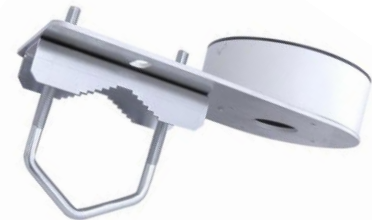

HIK134E + Z25DV75
+ DS-1280ZJ-DM46

technical parameters

material	AlMg3 thickness 3 mm
bracket (Fe galvanic zinc)	Z25DV75
weight	0,5kg
dimensions HIK120E	120x238x3mm
dimensions HIK120LE	120x115x130x3mm
openings	1x Ø34, 4x oval 20x9, 8xØ3,5mm
installation	tube from Ø 27 up to Ø 62mm



UH85

use: the bracket has integrated mounting holes for sockets DS-1280ZJ-DM46, DS-1260ZJ, DS-1280ZJ-DM18, DS-1280ZJ-PT3J (Hikvision), TD-YXH0101B, TD-YXM0103 (TVT)

note : HIK134E (LE) + Z25DV75 can also be used for other mounting bases (cameras), the preparation of the necessary mounting holes (Ø3.5mm) is not difficult as the HIK134E (LE) plate is made of aluminum alloy (AlMg3)

Oval holes allow the use of other mounts in addition to the Z25DV75, e.g. Z85DV85, for jackel mounting it is possible to use UH85

supplied accessories: 4 pcs of self-tapping screws DIN7516 M4x12

